

# 14/2 (19/0.36) PLENUM CMP/CL2P


Audio and Control



## 1402UCMP5BW - CONTROL CABLE 14/2 (19/0.36) CMP/CL2P 500' WHITE PULL BOX

Content of the Data Sheet

Part number	1402UCMP5BW		
Voltage	300V		
Test Standard	UL444/UL13		
Conductor	Material	Stranded Bare copper	
	Nom.O.D.(mm)	19/0.36	1.82mm
Insulation	Material	LOW SMOKE PVC	
	Diameter	2.3±0.07 mm	
shielding	-----		
Sheath	Thickness	0.40±0.05mm	
	External O.D.	5.3+/-0.25 mm	
	Surface	Wavy	
	Material	LOW SMOKE PVC	
	Color	White	
Surface Printing	Letter height	3.0±0.3mm	
	Color	BLACK	
	Print error & Space	≤±0.5%, 1m	
Core Color	1. Black, 2.Red		
Packing	500FT/PULL BOX		
Weight	20.5 lbs/BOX		
Packing length	500ft±4ft		
Rip-cord	Yes	Drain wire	No
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥10.0	
	Elongation(%)	≥100	
	Aging Period (°C×hrs)	100°C×24h×7d	
	After Aging Elongation(%)	≥75	
Electrical Characteristics (20°C)	Capacitance	130Pf/m	
	-----		
DC Resistance (Ω/km) max	8.85		
	Spark test	2.5kv	
	Dielectric Test	2kv/min	
Temperature Range:	-20°C to +75°C		

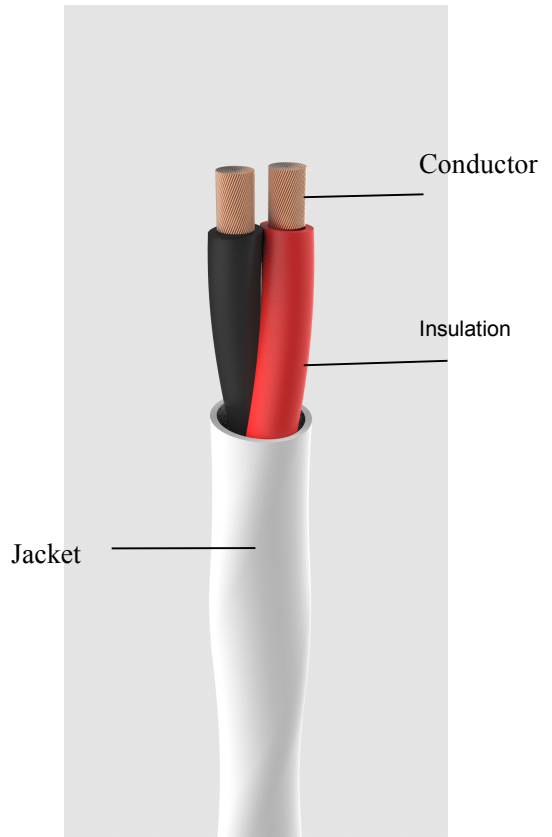

MEET RoHS ETL