


# 16/2 (19 STRANDED) PLENUM CMP/CL2P

Audio and Control



## 1602UCMP5BW - CONTROL CABLE 16/2 (19 STRANDED) CMP/CL2P 500' WHITE PULL BOX

Content of the Data Sheet			
Part number	1602UCMP5BW		
Voltage	300V		
Test Standard	UL444/UL13		
Conductor	Material	Stranded Bare copper	
	Nom.O.D.(mm)	19/0.29	1.45mm
Insulation	Material	Low smoke PVC	
	Diameter	1.90±0.05 mm	
shielding	-----		
Sheath	Thickness	0.40±0.05mm	
	External O.D.	4.6±0.2 mm	
	Surface	Wavy	
	Material	Low smoke PVC(complies RoHS)	
	Color	White	
Surface Printing	Letter height	3.0±0.3mm	
	Color	BLACK	
	Print error & Space	≤±0.5%, 1m	
Core Color	1. Black, 2.Red		
Packing	500FT/PULL BOX		
Weight	14 lbs/BOX		
Packing length	500ft±4ft		
Rip-cord	Yes	Drain wire	No
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥10.0	
	Elongation(%)	≥100	
	Aging Period (°C×hrs)	100°C×24h×7d	
	After Aging Elongation(%)	≥75	
Electrical Characteristics (20°C)	Cold bend(-20±2°C×4h) 8×Cable O.D.,	No visible cracks	
	Capacitance	130pf/m	
Electrical Characteristics (20°C)	-----		
	DC Resistance (Ω/km) max	13.9	
	Spark test	2.5kv	
	Dielectric Test	2kv/min	
Temperature Range:	-20°C to + 75°C		

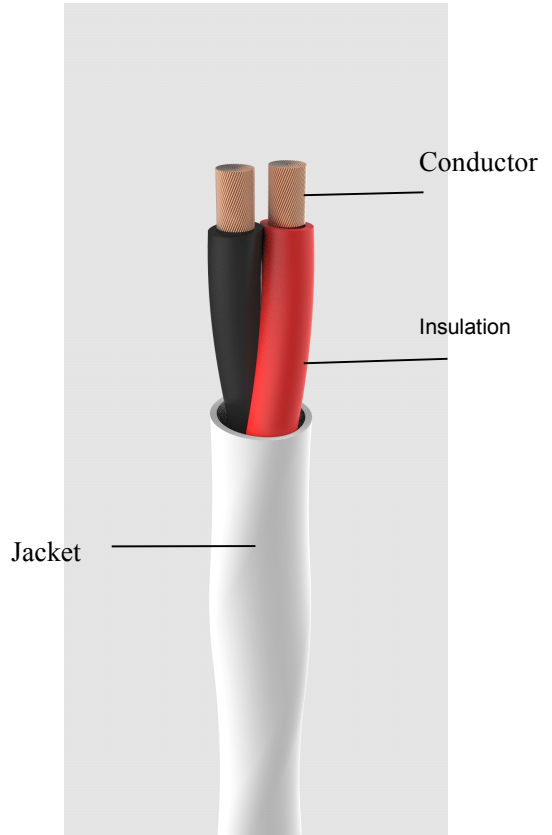

MEET RoHS ETL