


RG6/U + 18/2 CATV RISER



75 OHM BROADBAND COAXIAL CABLE

Cross Section

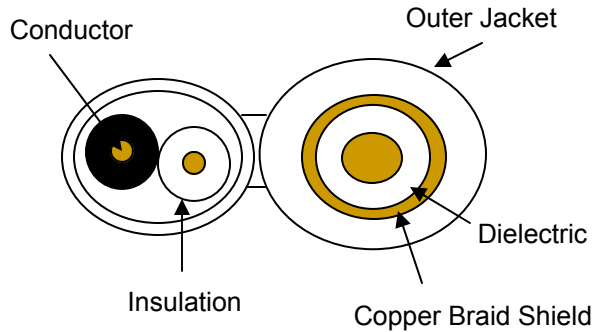

Marking

COMMODITY CABLES, INC., (UL) c(UL) MODEL
6182SCCMRRB RG6 BC., 18AWG, CMR U/V 1,000MHz,
2x18AWG BARE COPPER STRANDED, 1000 FEET, MM/YY

Description

This cable has 18 AWG bare copper center conductor surrounded by a foam polyethylene dielectric, 95% bare copper braid and PVC jacket. Use for CL1, CL2, CM, CMX and CMG installations.

Applications

Indoor for CCTV, MATV and SMATV
Outdoor for Digital Satellite Reception

Construction

RG6	
Conductor:	Solid Bare Copper
AWG:	18
Conductor Dia.:	0.040 in.
Insulation:	Gas Injected Foam PE
Insulation Nom O.D.:	0.18 in.
Shields Number:	2
Coverage:	Bare Copper Braid, 95%
Jacket:	CMR/PVC
Nom. Outer Diameter:	0.272 in.
Temperature Range:	-20 to 75 °C
Product Rating:	UL/cUL
Flammability Test:	CMR/CCTVR/CL2

Part No. 6182SCCMRRB



Performance

Attenuation			Return Loss	
MHz	db/100ft	db/100m	MHz	db
10	0.81	2.66	5-470	≥26
50	1.46	4.79		
200	2.83	9.28	470-860	≥24
700	5.60	18.37		
1000	6.59	21.26	860-1000	≥22

Standard

NEC Article 800 and 820 Compliance

Standard Packaging



1000' Wooden Reel

Weight
58 Lbs.

Color (s)

Jacket colors: **Black**

To find out more, please contact us at:

Commodity Cables, Inc.
4180 Capital View Drive
Suwanee, GA 30024
1-866-945-5051
www.commoditycables.com



Quality Products, Fast Delivery and the Highest Standards of Service!

**Cable & Connectivity Products for
Commercial & Residential Installations**

