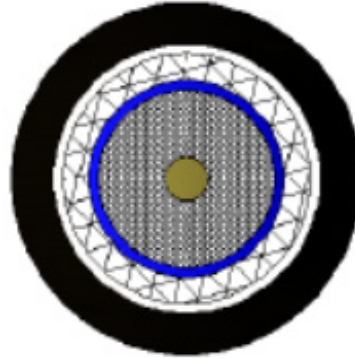


RG11 STANDARD TYPE, 60% BRAID COAXIAL CABLE
PART NO. 11OUTWCCSRB
DESCRIPTION:

RG11 STANDARD TYPE, 60% BRAID CO-AXIAL CABLE, PE JACKET, FLOODED FOR UNDERGROUND 1000 FT WOOD REEL

Category: RG11 CMR

Test Standard: ETL


PERFORMANCE

Frequency (MHz)	ATT (dB)
55	0.96
211	1.90
300	2.25
400	2.60
550	3.05
750	3.65
870	4.00
1000	4.36

STANDARD PACKAGE

Packing	Wooden Reel
Weight	46 lbs
Packing Length	1000 ft

Toll Free: (866) 945-5051
 Local: (770) 945-5051
 Fax: (770) 945-9582
www.commoditycables.com


CONSTRUCTION DETAILS

Conductor	Material	Solid copper clad steel		
	Nom. O.D. (mm)	1.63	up	+0.01
			down	-0.01
Insulation	Material	Foam PE		
	Diameter	7.11± 0.15 mm		
First Shield	Material	Aluminum/PET-Foil-Bonded		
Second Shield	Material	Aluminum Wire		
	Construction	0.15mm×16×16		
Flooded	Material	Water blocking tape		
Sheath	Nom. Thickness	1.0mm		
	External O.D	10.00±0.20mm		
	Material	PE(complies RoHS)		
	Color	BLACK		
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥15.0		
	Elongation(%)	≥500		
Electrical Characteristics (20°C)	Nom. Centre Conductor DC Resistance	13.0 ohm/kft		
	Velocity of Propagation (%)	85%		
	Nominal Capacitance	15.6 pF/ft		
	Impedance	75±3 Ohms		
	Jacket Spark Test Voltage	AC 3000V		
Temperature Range	-40°C to +80°C			