


THERMOSTAT WIRE

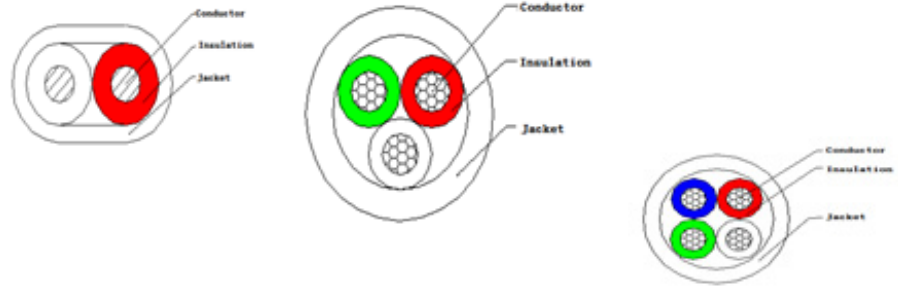

PRODUCT CONSTRUCTION :

CONDUCTOR:

Annealed Solid bare copper

INSULATION:

FR-PVC

Color code: See chart below

JACKET:

FR-PVC White

Suitable for use from -20°C to +75°C

Evey 2 feet sequential marking

APPLICATIONS:

Used for power limited circuits such as thermostat, air conditioning and heating controls, heat pumps, bell and alarm systems, intercom systems, door bells, remote control units where maximum voltage does not exceed 30 volts.

COMPLIANCES:

UL type CL3

UL type CL2

INDUSTRY APPROVALS:

CL3 CL2-power limited

NEC Article 725

Sunlight Resistant

ROHS REACH

CABLE PRINTING:

Commodity Cables Thermostat Cable xC/
xxAWG (ETL) CCI# CL2 CL3 Sunlight Resis-
tant ROHS 0002----XXXFT

NO. of Cond.	AWG Size	Part no.	Insulation Dia. mm	Jacket thickness mm	Nom. Jacket dia.mm	Standard Lengths
2	18	182TSTATS5W/2M	1.45	0.4	3.5X2.2	2000M (500'X4)
3	18	183TSTATS5W/2M	1.45	0.4	3.7	2000M (500'X4)
4	18	184TSTATS5W/2M	1.45	0.4	4.1	2000M (500'X4)
5	18	185TSTATS250W/2M	1.45	0.4	4.4	1000M (250'X4)
6	18		1.45	0.4		
7	18		1.45	0.4		
8	18		1.45	0.4		
9	18		1.45	0.4		
10	18		1.45	0.4		
12	18		1.45	0.4		
2	20	202TSTATS5W/2M	1.25	0.4	3.2X2.0	2000M (500'X4)
3	20		1.25	0.4		
4	20		1.25	0.4		
5	20		1.25	0.4		
6	20		1.25	0.4		
7	20		1.25	0.4		
8	20		1.25	0.4		
9	20		1.25	0.4		
10	20		1.25	0.4		

No.of Cond.	Color	No. of Cond.	Color
1	Red	7	Orange
2	White	8	Black
3	Green	9	Pink
4	Blue	10	Gray
5	Yellow	11	Tan
6	Brown	12	Purple

Toll Free: (866) 945-5051
Local: (770) 945-5051
Fax: (770) 945-9582
www.commoditycables.com



All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice