


# COMMODITY CABLES, INC.

## RG59/U CCTV RISER 75 OHM BROADBAND COAXIAL CABLE

### Cross Section

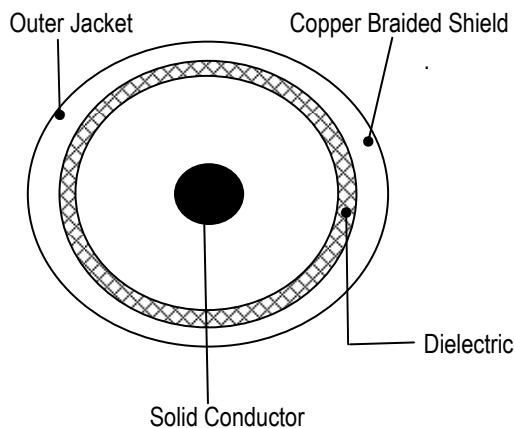

### Part No.: 59SCCMRxx



### Performance

Attenuation			Return Loss	
Mhz	db/100ft	db/100m	Mhz	db
1	0.20	0.65	5-470	>20
10	0.82	2.69		
100	2.62	8.59		
400	5.45	17.88	470-860	>20
700	7.52	24.67	860-2500	>15
900	8.60	28.21		
1000	9.29	30.47		

### Marking

E#, RG59, 20awg, Solid Bare Copper, 95% Copper Braid ,  
75C (UL) CMR/CATVR/CCTV, feet marking, Commodity Cables,  
Model #

### Description

Rated Temperature(°C) 75  
Product Rating CCTV/UL/CMR  
Flammability Test CMR

#### Application

Digital, Analog, CATV, Satellite, Off-Air, Broadband  
Communication


#### Reference Standard

NEC Article 800 and 820 Compliance

### Construction

<b>Conductor</b>	<b>Solid Bare Copper</b>	
AWG	20awg.	
Conductor Dia.(in.)	0.032in.	
<b>Dielectric Material</b>	<b>Nitro Injected PE</b>	
Outer Diameter (in.)	0.144in.	
<b>Shields Number</b>	<b>2</b>	
<b>Coverage</b>	<b>1st</b>	<b>AP/APA</b>
	<b>2nd</b>	<b>Copper Braid</b>
<b>Jacket</b>	<b>Riser/PVC</b>	
Nom. Outer Diameter (in.)	0.24in.	
Nominal Impedance	75ohm	

### Standard Packaging



1000' Spool in a Box



1000' Wooden Reel

Weight: 35 lbs.

### Color

#### Jacket colors:

Standard

Black, White

\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.