


COMMODITY CABLES, INC.

RG59/U + 18awg/2c RISER 75 OHM BROADBAND COAXIAL CABLE

Cross Section

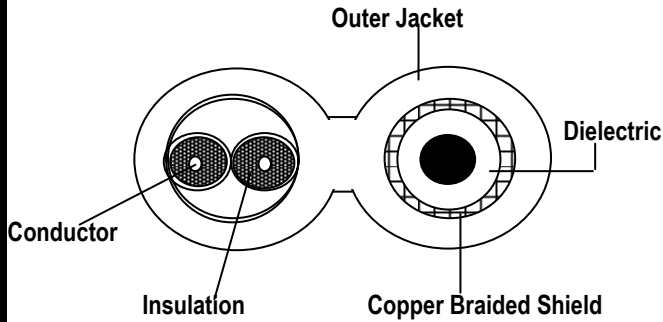

Part No.: 59182CMRxx



Performance

Attenuation			Return Loss	
Mhz	db/100ft	db/100m	Mhz	db
1	0.20	0.65	5-470	>20
10	0.82	2.69		
100	2.62	8.59		
400	5.45	17.88	470-860	>20
700	7.52	24.67	860-2500	>15
900	8.60	28.21		
1000	9.29	30.47		

Marking

E#, RG59, 20awg, Solid Bare Copper, 95% Copper Braid, & 18awg/2c, 75ohm, feet marking, Commodity Cables Model #

Description

Rated Temperature(I) 75
 Product Rating CCTVR/UL/CMR
 Flammability Test CMR

Application

Digital, Analog, CATVR, Satellite, Off-Air, Broadband Communication

Reference Standard

NEC Article 800 and 820 Compliance

Construction

18awg/2c (7x26) Bare Copper

RG59

Conductor Solid Bare Copper
 AWG 20awg.
 Conductor Dia.(in.) 0.032in.

Dialectric Material Nitro Injected PE
 Outer Diameter (in.) 0.144in.

Shields Number 2


Coverage 1st AP/APA
 2nd 95% Copper Braid

Jacket RISER/PVC

Nom. Outer Diameter (in.) 0.24in.

Nominal Impedance 75ohm

Standard Packaging

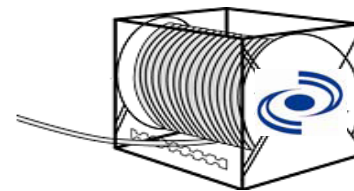

500ft/1000 ft. Spool in a Box

Color

Jacket colors:

Standard Black, White