


1 RG6 DUAL + 1 CAT5E 350MHz. PVC SIAMESE, CMR

PART NO. 11CCSCMPRX

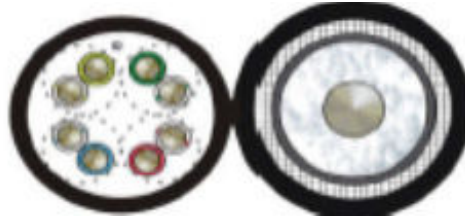

DESCRIPTION:

1 RG6 DUAL + 1 CAT5E 350MHz. PVC SIAMESE, CMR

Category: RG6 DUAL+CAT5E

Test Standard: UL CMP

RG6 DUAL PERFORMANCE

Frequency (MHz)	Attenuation (dB/100ft)	RL (dB)
10	0.81	≥26
50	1.46	
200	2.83	≥24
700	5.60	
1000	6.59	≥22
1450	8.04	
2200	9.80	
2500	10.45	
2800	11.06	
3000	11.44	≥22

STANDARD PACKAGE

Packing	1000' or 5000' Wooden Reel
Color	white or Orange Jacket

Toll Free: (866) 945-5051

Local: (770) 945-5051

Fax: (770) 945-9582

www.commoditycables.com

CONSTRUCTION DETAILS

RG6 DUAL	
Center Conductor	18 AWG 1.02 mm CCS
INSULATOR	4.57±0.05mm Foam Polyester
Foil Shield	Bonded Foil, 120%
Braid Shield	Aluminum braid, 60%
Jacket	6.91±0.1mm PVC
CAT 5E	
Center Conductor	1/0.50mm, 24AWG Solid Copper
Insulator	0.91±0.02mm PE
Jacket	5.1±0.1mm PVC

Frequency (MHz)	RL (dB)	Attenuation (dB /100m)	NEXT (dB)	ACR (dB/100m)	Delay Max (ns /100)	ELF-EXT (dB /100m)	PSEL FEXT (dB /100m)	PS-NEXT (dB)
0.772	19.4	1.8	67	67.2	575	66	63	64
1	20	2	65.3	66.3	570	63.8	60.8	62.3
4	23	4.1	56.3	55.2	552	51.7	48.7	53.3
8	24.5	5.8	51.8	49	546.7	45.7	42.7	48.8
10	25	6.5	50.3	45.8	545.4	43.8	40.8	47.3
16	25	8.2	47.3	41	543	39.7	36.7	44.3
20	25	9.3	45.8	38.5	542	37.7	34.7	42.8
25	24.3	10.4	44.3	36.9	541.2	35.8	32.8	41.3
31.25	23.6	11.7	42.9	32.2	540.4	33.9	30.9	39.9
62.5	21.5	17	38.4	22.4	538.6	27.8	24.8	35.4
100	20.1	22	35.3	13.3	537.6	23.8	20.8	32.3
200	18	32.4	30.8	N/A	N/A	N/A	N/A	N/A
300	16.8	41	28.02	N/A	N/A	N/A	N/A	N/A
350	16.3	44.9	27.2	N/A	N/A	N/A	N/A	N/A



*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice*