

**DESCRIPTION**

- 24 AWG 4Pair U/UTP Category 5E cable tested to 350 MHz. Available on Wood Reels

**FEATURES AND BENEFITS**

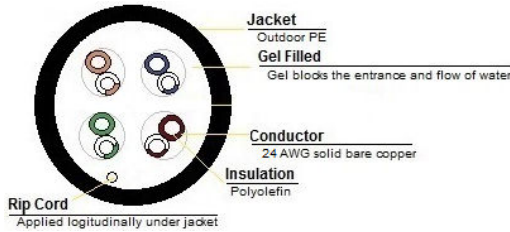
- Structured cabling for Ethernet Networks
- Protects against environmental elements that can cause electrical performance failures
- Prevents moisture migration
- Performance guaranteed to 350 MHz
- Sequential footage markings
- UV Resistant
- Verified by third-party for guaranteed performance

**APPLICATIONS**

- IEEE 802.3 1000Base-T, 100Base-TX, 10Base-T, PoE, PoE+
- CDDI, Token Ring, ATM
- Armored: aerial, duct and buried installations
- Broadband and Baseband Analog Video

**STANDARD COMPLIANCES**

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class EI)
- ICEA 8-102-700 (Category 6 or 5E)
- REACH Compliant
- CPR Compliant (Fully Comply to 305/2011 & EN 50575:2014-09)
- RoHS Compliant Directive 2002/95/EG


**PHYSICAL PROPERTIES**

|                      |                               |                           |
|----------------------|-------------------------------|---------------------------|
| Conductor            | Material                      | Copper                    |
|                      | Nominal Outside Diameter (mm) | 0.50                      |
| Insulation           | Material                      | HDPE                      |
|                      | Diameter (± 0.05mm)           | 0.90                      |
| Screen Material      |                               | None                      |
| Construction         |                               | Direct Burial/Gell Filled |
| Jacket               | Material                      | LLDPE                     |
|                      | Average Thickness (mm)        | 0.55                      |
|                      | Minimum Point Thickness (mm)  | 0.50                      |
|                      | Outside Diameter (±0.2mm)     | 5.15                      |
| Rip Cord:            |                               | 250D Nylon                |
| Drain Wire:          |                               | None                      |
| Packing              | Length                        | 1000ft/Wood Reel          |
|                      | Weight                        | 22 lbs                    |
| Voltage Rating (Max) |                               | 300V                      |


**ELECTRICAL CHARACTERISTICS**

|  |                        |                |
|--|------------------------|----------------|
| 1.0 - 250.0MHz characteristic impedance (ohms) |                        | 100±15         |
| 250-650.0MHz Delay Skew (ns/100m)              |                        | 45             |
| Pair-to-Ground Capacitance Unbalance (Pf/100m) |                        | 53             |
| Max. Conductor DC Resistance Unbalance (%)     |                        | 95             |
| Max. Resistance Unbalance (%)                  |                        | 3              |
| Max Mutual Capacitance                         |                        | 330            |
| Max DC Loop Resistance                         |                        | 25             |
| Min DC Insulation Resistance                   |                        | -              |
| Max Propagation Delay Skew                     |                        | 45             |
| Before Aging                                   | Tensile Strength (Mpa) | ≥13.8          |
|  | Elongation (%)         | ≥300           |
| After Aging                                    | Tensile Strength (Mpa) | ≥85% of unaged |
|  | Elongation (%)         | ≥50% of unaged |
| Aging Period (°C x hrs)                        |                        | 100x240        |
| Cold Bend (No Visible Crack)                   |                        | -40±2°C        |
| Temperature Range                              |                        | -40 ~ 75°C     |
| Velocity of Propagation (%) NVP                |                        | 68             |


 1000' Wood Reel  
Weight: 22 lbs.

Toll Free: (866) 945-5051  
Local: (770) 945-5051  
Fax: (770) 945-9582  
www.commoditycables.com


**AVAILABLE CATEGORY 5E (PART NUMBERS)**

| PVC         | Plenum      | Shielded   | Shielded Plenum | Direct Burial      | Shielded Direct Burial |
|-------------|-------------|------------|-----------------|--------------------|------------------------|
| 5ECMR150CO  | 5ECMP244Bx  | 5ESHDCMRBx | 5ESHDCMPBx      | 5EOUT244RB         | 5EOUTGSHDRB            |
| 5ECMR244Bx  | 5ECMP150CO  |            |                 | <b>5EOUTG244RB</b> | 5EOUTWSHDRB            |
| 5ECMR2425RG | 5ECMP2425RO |            |                 | 5EOUTW244RB        | 5EOUTSHDDJRB           |
| 5ECMSTRxx   |             |            |                 | 5EOUTA244RB        |                        |

\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*

# CAT5E 24AWG/4PAIR 350MHz U/UTP DIRECT BURIAL GELL FILLED

**PART NO. 5EOUTG244RX**

## ELECTRICAL PERFORMANCE

ACRF - Attenuation to Crosstalk Ratio - Far End (dB/100m)

NEXT - Near End Crosstalk (dB/100m)

ACR - Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT - Power Sum Near End Crosstalk (dB/100m)

ELFEXT - Equal Level Far End Crosstalk (dB/100m)

PSELFEXT - Power Sum Equal Level Far End Crosstalk (dB/100m)

RL - Return Loss (dB)

TCL - Transverse Conversion Loss (dB/100m)

ATT - Attenuation (dB/100m)

| FREQUENCY<br>(MHz) | ATT<br>(dB/100m) | RL<br>(dB) | ACR<br>(dB) | Next<br>(dB) | PSNEXT<br>(dB) | TCL<br>(dB/100m) | PHASE<br>DELAY | ELFEXT<br>(dB/100m) | PSELFEXT<br>dB/100m) |
|--------------------|------------------|------------|-------------|--------------|----------------|------------------|----------------|---------------------|----------------------|
| 1                  | 2.0              | 20.0       | 63.3        | 65.3         | 62.3           | n/s              | 570.0          | 63.8                | 60.8                 |
| 4                  | 4.1              | 23.0       | 52.2        | 56.3         | 53.3           | n/s              | 552.0          | 51.7                | 48.7                 |
| 8                  | 5.8              | 24.5       | 46.0        | 51.8         | 48.8           | n/s              | 546.7          | 45.7                | 42.7                 |
| 10                 | 6.5              | 25.0       | 43.8        | 50.3         | 47.3           | n/s              | 545.4          | 43.8                | 40.8                 |
| 16                 | 8.2              | 25.0       | 39          | 47.2         | 44.2           | n/s              | 543.0          | 39.7                | 36.7                 |
| 20                 | 9.3              | 25.0       | 36.5        | 45.8         | 42.8           | n/s              | 542.1          | 37.7                | 34.7                 |
| 25                 | 10.4             | 24.3       | 33.9        | 44.3         | 41.3           | n/s              | 541.2          | 35.8                | 32.8                 |
| 31.25              | 11.7             | 23.6       | 31.2        | 42.9         | 39.9           | n/s              | 540.4          | 33.9                | 30.9                 |
| 62.5               | 17.0             | 21.5       | 21.4        | 38.4         | 35.4           | n/s              | 538.6          | 27.8                | 24.8                 |
| 100                | 22               | 20.1       | 13.3        | 35.3         | 32.3           | n/s              | 537.6          | 23.8                | 20.8                 |
| 200                | 29.0             | 18.0       | 1.8         | 30.8         | 27.8           | n/s              | 536.5          | 17.7                | 14.7                 |
| 350                | 44.9             | 16.3       | --          | 27.2         | 26.3           | n/s              | 535            | 12.9                | 9.9                  |

\*Electrical performance with frequency over 250MHz is only for reference\*

## JACKETS ABBREVIATION

| AVAILABLE JACKET COLORS |                       |       |
|-------------------------|-----------------------|-------|
| STANDARD                | BLACK                 |       |
| SPECIAL                 | Per Customer Request* |       |
| INSULATION COLORS       |                       |       |
| PAIR 1                  | BLUE                  | WHITE |
| PAIR 2                  | ORANGE                | WHITE |
| PAIR 3                  | GREEN                 | WHITE |
| PAIR 4                  | BROWN                 | WHITE |

|        |    |  |
|--------|----|--|
| Black  | B  | Last alphabetical character of each part number indicates the color code that the Jacket is available in. For example Part # 6CMR244Bx ("x" indicates all the colors to the left are available for this product. |
| White  | W  |  |
| Gray   | G  |  |
| Blue   | O  |  |
| Yellow | Y  |  |
| Green  | V  |  |
| Orange | OR |  |
| Purple | P  |  |
| Red    | R  |  |
| Pink   | PI |  |

Toll Free: (866) 945-5051  
Local: (770) 945-5051  
Fax: (770) 945-9582  
[www.commoditycables.com](http://www.commoditycables.com)



\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*