


600 VOLT
SECONDARY UD – QUADRUPLIX

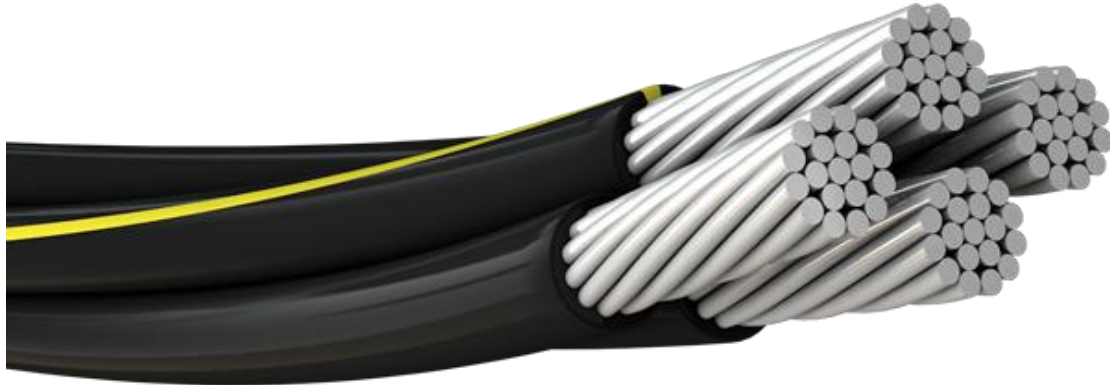

APPLICATION

Directly buried or installed in ducts for 600 volt secondary distribution.

PRODUCT FEATURES

Concentric stranded or compressed 1350-H19 aluminum conductor, crosslinked polyethylene insulation. Insulated conductors surface printed, neutral, triple yellow striped or solid yellow. Black neutrals may be specified if desired.

STANDARDS

UL Standard 854 for Type USE-2
ASTM B-230, B-231 and ICEA S-105-692

Code Word	Phase Conductors			Neutral Conductor			Single	Outside	Weight
							Phase	Diameter	per 1000 ft
	Conductor (in)	(in)	(lbs)						
	Size	Strand	Insulation Thickness	Size	Strand	Insulation Thickness			
AWG		(MLS)	AWG		(MLS)				
Windham	750	61/w	110	500	37/w	95	0.648	2.628	2,948