

### DESCRIPTION

- 23 AWG 4 Pair UTP 10G Category 6A ca-ble tested to ANSI/TIA - 568.2-D for 10Gbps @500Mhz premium grade, high performance for top level network cabling for maximum headroom and bandwidth. Available in Wood Reel for easier installation.

### FEATURES AND BENEFITS

- Category 6A performs at improved specifications, particularly in the area of alien cross-talk. Category 6A make use of their higher standards by allowing full 10GBASE-T transmission speeds of up to 10Gbps, at 500MHz of signal bandwidth, over 100 meters (330 ft)
- Improved cable temperature rating (90°C Plenum) for greater protection against increased operating temperatures and for high-wattage applications
- The internal separator optimizes each pair for superior electrical performance and maintains flexibility. This unique spline stabilizes each pair to create a smaller, round cable profile


### APPLICATIONS

- IEEE 802.3 10G Base-T, 1000Base-T, 100Base-TX, 10Base-T, PoE, PoE+
- ANSI/TIA 854: 1000Base-TX
- CDDI, Token Ring, ATM
- Digital Video
- Broadband and Baseband Analog Video

### STANDARD COMPLIANCES

- ANSI/TIA - 568.2-D
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class EI)
- ICEA 8-102-700 (Category 6 or 5E)
- REACH Compliant
- CPR Compliant (Fully Comply to 305/2011 & EN 50575:2014-09)
- RoHS Compliant Directive 2002/95/EG

**Toll Free: (866) 945-5051**  
**Local: (770) 945-5051**  
**Fax: (770) 945-9582**  
[www.commoditycables.com](http://www.commoditycables.com)

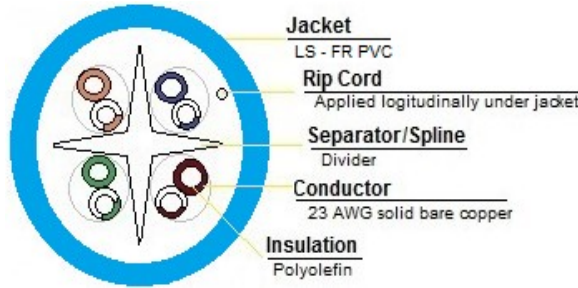

### PHYSICAL PROPERTIES

Conductor	Material	Bare copper
	Nominal Outside Diameter (mm)	4x2x0.58 (±0.005)
Insulation	Material	FEP
	Diameter (± 0.05mm)	1.05±0.03
Filler		Low Smoke
Construction		Unshielded/Plenum
Jacket	Material	LS-FR PVC
	Average Thickness (mm)	0.85
	Minimum Point Thickness (mm)	0.7
	Outside Diameter (±0.2mm)	8.2
Rip Cord:		Yes
Drain Wire:		No
Packing	Length	1000ft ± 4ft
	Weight	42 lbs/Reel
Voltage Rating (Max)		DC 300V
Flame Test Method		CMP



### ELECTRICAL CHARACTERISTICS

1.0 - 250.0MHz characteristic impedance (ohms)		100Ω±15Ω
250-650.0MHz Delay Skew (ns/100m)		≤45
Pair-to-Ground Capacitance Unbalance (Pf/100m)		≤330
Max. Conductor DC Resistance Unbalance (%)		9.38/100m
Max. Resistance Unbalance (%)		≤5
Max Mutual Capacitance		5.6nf/100m
Max DC Loop Resistance		19.25 l/100m
Min DC Insulation Resistance		150 ms2/km
Max Propagation Delay Skew		≤40
Before Aging	Tensile Strength (Mpa)	≥13.8
	Elongation (%)	≥75
After Aging	Tensile Strength (Mpa)	≤50
	Elongation (%)	≥75
Aging Period (°C x hrs)		100°C x 24h x 7d
Cold Bend (No Visible Crack)		-20±2°C
Temperature Range		-20°C ~ +75°C
Velocity of Propagation (%) NVP		70%



1000' Wood Reel  
Weight: 42 lbs.

### AVAILABLE CATEGORY 6 (PART NUMBERS)

PVC	Plenum	Shielded	Shielded Plenum	Direct Burial	Shielded Direct Burial
6ACMR234Rx	<b>6ACMP234Rx</b>	6ASHDCMRRx	6ASHDCMPRx	6AOUTG234RB	6AOUTGSHDRB

\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*



## PART NO. 6ACMP234Rx

### ELECTRICAL PERFORMANCE

#### ELECTRICAL PERFORMANCE

ACRF - Attenuation to Crosstalk Ratio - Far End (dB/100m)

NEXT - Near End Crosstalk (dB/100m)

ACR - Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT - Power Sum Near End Crosstalk (dB/100m)

ELFEXT - Equal Level Far End Crosstalk (dB/100m)

PSELFEXT - Power Sum Equal Level Far End Crosstalk (dB/100m)

RL - Return Loss (dB)

TCL - Transverse Conversion Loss (dB/100m)

ATT - Attenuation (dB/100m)

FREQUENCY (MHz)	ATT (dB/100m)	RL (dB)	ACR (dB)	Next (dB)	PSNEXT (dB)	TCL (dB/100m)	PHASE DELAY	ELFEXT (dB/100m)	PSELFEXT (dB/100m)
1	2.1	20.0	72.2	75.3	72.3	40.0	570.0	68.0	65.0
4	3.8	23.0	61.5	66.3	63.3	40.0	552.0	56.0	53.0
8	5.3	24.5	55.4	61.8	58.8	40.0	546.7	49.9	46.9
10	5.9	25.0	53.4	60.3	57.3	40.0	545.4	48.0	45.0
16	7.5	25.0	48.8	57.2	54.2	38.0	543.0	43.9	40.9
20	8.4	25.0	46.4	55.8	52.8	37.0	542.1	42.0	39.0
25	9.4	24.3	43.7	54.3	51.3	36.0	541.2	40.0	37.0
31.25	10.5	23.6	41.4	52.9	49.9	35.1	540.4	38.1	35.1
62.5	15.0	21.5	32.4	48.4	45.4	32.0	538.6	32.1	29.1
100	19.1	20.1	25.2	45.3	42.3	30.0	537.6	28.0	25.0
200	27.6	18	12.2	40.8	37.8	27.0	536.5	22.0	19.0
250	31.1	17.3	7.2	39.3	36.3	26.0	536.3	20.0	17.0
300	34.3	16.8	2.9	38.3	-	25.2	535.5	-	-
400	40	15.9	-	37.8	35	24.0	535	-	-
500	45.3	15.2	-	36.5	34.3	23.0	533	-	-
600	50.1	14.5	-	35	33.5	-	532	-	-
650	52.4	13.9	-	34.6	31.2	-	530	-	-

\*Electrical performance with frequency over 500MHz is only for reference\*

#### AVAILABLE JACKET COLORS

STANDARD	BLUE	GREEN	YELLOW	WHITE
SPECIAL	Per Customer Request*			
INSULATION COLORS				
PAIR 1	BLUE	WHITE		
PAIR 2	ORANGE	WHITE		
PAIR 3	GREEN	WHITE		
PAIR 4	BROWN	WHITE		

#### JACKETS ABBREVIATION

Black	B	Last alphabetical character of each part number indicates the color code that the Jacket is available in. For example Part # 6CMR244Bx ("x" indicates all the colors to the left are available for this product.
White	W	
Gray	G	
Blue	O	
Yellow	Y	
Green	V	
Orange	OR	
Purple	P	
Red	R	
Pink	PI	

Toll Free: (866) 945-5051  
 Local: (770) 945-5051  
 Fax: (770) 945-9582  
[www.commoditycables.com](http://www.commoditycables.com)



\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*