

**PART NO. 6OUTGSHDRX**
**DESCRIPTION**

- 23 AWG 4 Pair F/UTP Category 6 cable tested to 550Mhz premium grade, high performance for top level network cabling for maximum headroom and bandwidth. Available in wood reel for easier installation.

**FEATURES AND BENEFITS**

- Cross web filler for enhanced performance
- Rugged jacket for outside plant applications
- UV resistant polyethylene jacket
- Gel filled core
- Sequential footage markings
- Verified by third-party for guaranteed performance

**APPLICATIONS**

- IEEE 802.3 1000Base-T, 100Base-Tx  
10Base-T, PoE+
- ANSI/TIA 854: 1000Base-TX
- CDDI, Token Ring, ATM
- Digital Video
- Broadband and Baseband Analog Video

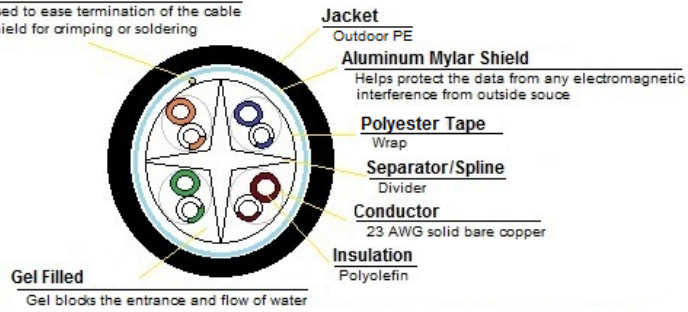
**STANDARD COMPLIANCES**

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class EI)
- ICEA 8-102-700 (Category 6 or 5E)
- REACH Compliant
- CPR Compliant (Fully Complies to 305/2011 & EN 50575:2014-09)
- RoHS Compliant Directive 2002/95/EG

Toll Free: (866) 945-5051  
Local: (770) 945-5051  
Fax: (770) 945-9582  
[www.commoditycable.com](http://www.commoditycable.com)


**Drain Wire**

Used to ease termination of the cable shield for crimping or soldering


**PHYSICAL PROPERTIES**

Conductor	Material	Solid Bare copper
	Nominal O.D (mm)	0.565
Insulation	Material	HDPE
	Diameter (± 0.05mm)	1.12
Screen Material		Mylar + Al/Mylar
Construction		Direct Burial/Gel Filled/Shielded
Jacket	Material	PE (Complies RoHs) / UV Rated
	Average Thickness (mm)	0.6
	Minimum Point Thickness (mm)	0.5
	Outer Diameter (±0.5mm)	7.8
Rip Cord:		Yes
Drain Wire:		Yes
Put/UPs	Length	1000ft ± 4ft
	Weight	45 lbs/Reel
Voltage Rating (Max)		DC 300V


**ELECTRICAL CHARACTERISTICS**

1.0 - 100.0MHz characteristic impedance (ohms)		100±15
1.0 - 250.0MHz Delay Skew (ns/100m)		≤45
Pair - To - Ground Capacitance Unbalance (pF/100m)		≤330
Max. Conductor DC Resistance 20°C (ohms/100m)		9.38
Resistance Unbalance (%)		≤5
Before Aging	Tensile Strength (Mpa)	≥10.0
	Elongation (%)	≥350
After Aging	Tensile Strength (Mpa)	-
	Elongation (%)	≥300
Aging Period (°C x hrs)		100°C x 24h x 10d
Cold Bend (No Visible Crack)		-40±2°C
Temperature Range		-40°C ~ 60°C
Velocity of Propagation (%)		65



1000' Wood Reel  
Weight: 45 lbs.

**AVAILABLE CATEGORY 6 (PART NUMBERS)**

PVC	Plenum	Shielded	Shielded Plenum	Direct Burial	Shielded Direct Burial
6CMR244Bx	6CMP234Bx	6SHDCMRRx	6SHDCMPRx	6OUT234RB	<b>6OUTGSHDRB</b>
6CMR234Bx				6OUTG234RB	6OUTWSHDRB
				6OUTW234RB	
				6OUTA234RB	

\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.  
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*

### ELECTRICAL PERFORMANCE

ACRF - Attenuation to Crosstalk Ratio - Far End (dB/100m)

NEXT - Near End Crosstalk (dB/100m)

ACR - Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT - Power Sum Near End Crosstalk (dB/100m)

ELFEXT - Equal Level Far End Crosstalk (dB/100m)

PSELFEXT - Power Sum Equal Level Far End Crosstalk (dB/100m)

RL - Return Loss (dB)

TCL - Transverse Conversion Loss (dB/100m)

ATT - Attenuation (dB/100m)

FREQUENCY (MHz)	ATT (dB/100m)	RL (dB)	ACR (dB)	Next (dB)	PSNEXT (dB)	TCL (dB/100m)	ELFEXT (dB/100m)	PSELFEXT dB/100m)
0.772	1.8	20	74.2	76.0	74.0	40.0	-	-
1	2.0	21	72.3	74.3	72.3	40.0	67.8	64.8
4	3.8	23.4	61.5	65.3	63.3	40.0	55.7	52.8
8	5.3	24.6	55.4	60.8	58.8	40.0	49.7	46.7
10	6.0	25	53.3	59.3	57.3	40.0	47.8	44.8
16	7.6	25	48.6	56.2	54.2	38.0	43.7	40.7
20	8.5	25	46.2	54.8	52.8	37.0	41.7	38.8
25	9.5	24.3	43.7	53.3	51.3	36.0	39.8	36.8
31.25	10.7	23.6	41.1	51.9	49.9	35.1	37.9	34.8
62.5	15.7	21.5	31.7	47.4	45.4	32.0	31.8	28.9
100	19.8	20.1	24.1	44.3	42.3	30.0	27.8	24.8
200	29.0	18	10.0	39.8	37.8	27.0	21.8	18.8
250	32.8	17.3	4.6	38.3	36.3	26.0	19.8	16.8
300	36.4	16.8	0.7	37.1	35.1	-	18.3	15.3
350	39.8	16.3	-	36.1	34.1	-	16.9	13.9
400	43.0	15.9	-	35.3	33.3	-	15.8	12.8
500	48.9	15.2	-	33.8	31.8	-	13.8	10.8
550	51.8	14.9	-	33.2	31.2	-	13.0	10.0

\*Electrical performance with frequency over 250MHz is only for reference\*

AVAILABLE JACKET COLORS		
STANDARD	BLACK	
SPECIAL	Per Customer Request*	
INSULATION COLORS		
PAIR 1	BLUE	WHITE
PAIR 2	ORANGE	WHITE
PAIR 3	GREEN	WHITE
PAIR 4	BROWN	WHITE

### JACKETS ABBREVIATION

Black	B	Last alphabetical character of each part number indicates the color code that the Jacket is available in. For example Part # 6CMR244Bx ("x" indicates all the colors to the left are available for this product.
White	W	
Gray	G	
Blue	O	
Yellow	Y	
Green	V	
Orange	OR	
Purple	P	
Red	R	
Pink	PI	

Toll Free: (866) 945-5051  
Local: (770) 945-5051  
Fax: (770) 945-9582  
www.commoditycables.com



\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.  
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice\*